



SECTION A-A




SCREEN ANCHORAGE DETAIL
ALTERNATIVE 'B'



1. Straight holes 38 mm ϕ of the depth shown may be used in lieu of the tapered holes.
2. Resin capsule-type anchorage devices may be substituted for threaded rods.
3. Place screen on work area side of the temporary railing where traffic will only be on one side of the temporary railing.
4. Clinched 8d box nails may be substituted for screws. The nails shall be clinched on the work area side of the screen where traffic will only be on one side of the temporary railing.
5. U-bolts may be substituted for 6 mm ϕ bolts.
6. Openings in the screen of 1.0 m length shall be provided at 60 m intervals.

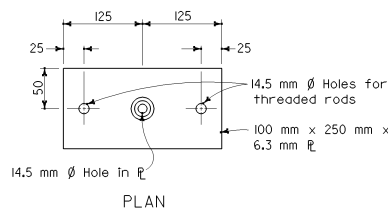

ANCHOR PLATE DETAIL
ALTERNATIVE 'A'



STATE OF CALIFORNIA
DEPARTMENT OF TRANSPORTATION

TEMPORARY TRAFFIC SCREEN

NO SCALE

ALL DIMENSIONS ARE IN
MILLIMETERS UNLESS OTHERWISE SHOWN